


DMX CONNECTION LEGEND


DMX Signal	Pin
SHLD/COM	1
D1-	2
D1+	3
D2- N/C	4
D2+ N/C	5

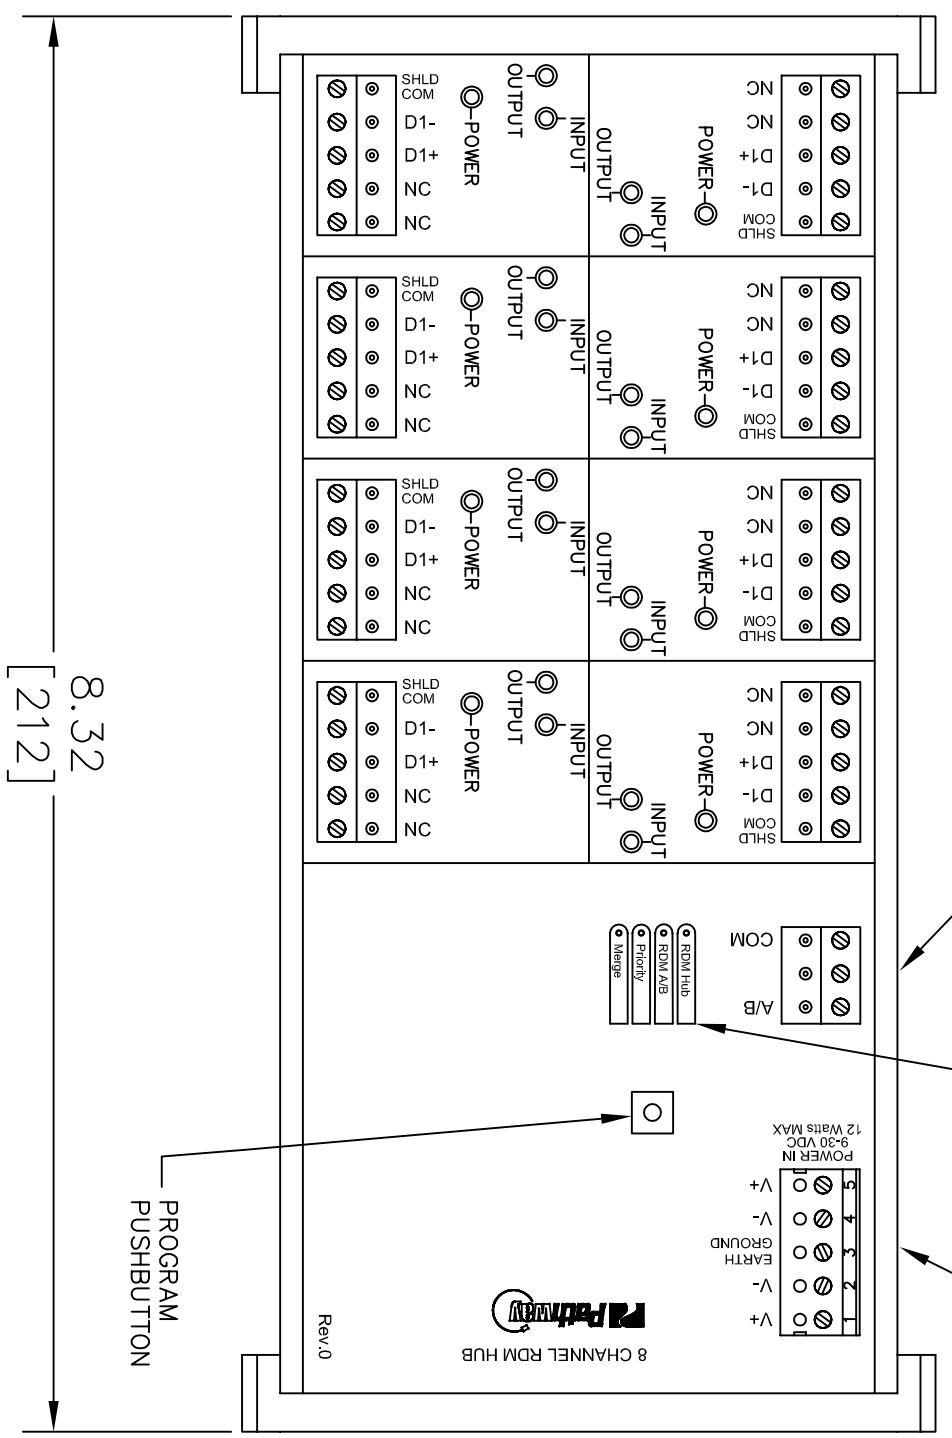

A/B DRY CONTACT CLOSURE

MENU FUNCTION LEDS

POWER IN:
9-30VDC , 5W SUPPLY REQUIRED. USE eDIN 1001 POWER SUPPLY OR EQUAL. CONNECT EARTH GROUND TO PROTECT DMX INPUT FROM RF INTERFERENCE CARRIED ON CABLE SHIELD

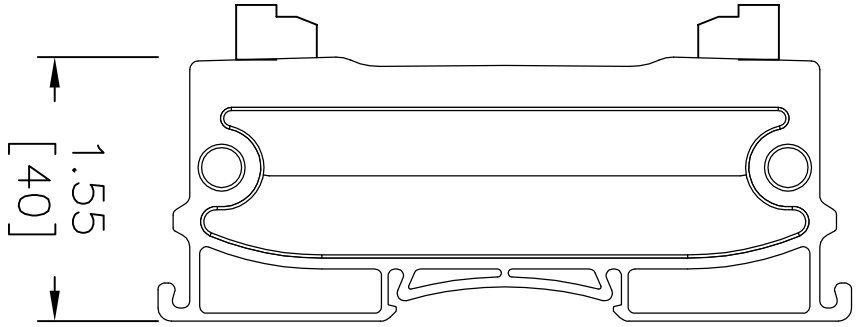

Z Fastening mechanism designed for 35 x 7.5mm DIN rail

1016 - RDM Hub 8 Channel

FILENAME: 1016 eDIN RDM Hub Rev0-New Endcap.dwg PART NUMBER: 1016



Pathway Connectivity
103 Inglewood Plaza, 1439 17th Avenue SE
Calgary, Alberta, Canada T2G 1J9
Phone: +1(403)243-8110 Fax: +1(403)287-1281
<http://www.pathwayconnect.com>

DRAWN BY:	
DATE:	11/20/2015
CHECKED:	
SCALE:	NTS
UNITS:	INCHES [mm]

REV **A**